

# Photodiode PR5010



## 2 compact Silicon pn Junctions with a common Cathode

PR5010 is a double silicon photodiode with two symmetrical anodes (A1/A2) and a common cathode (C), sensitive for visible light. The cathode forms an additional photodiode to the substrate (Sub) that is sensitive for infrared light.

Key features are the low dark current combined with a high sensitivity and an anti-reflective coating on the die.


PR5010 is available in an optical DFN package with a very small form factor.

### FEATURES

- common cathode
- low dark current
- varied spectral sensitivities
- anti-reflective coating (ARC)

### TYPICAL APPLICATIONS


- Laser beam alignment
- Optical encoders
- Position detection
- Ambient light detection

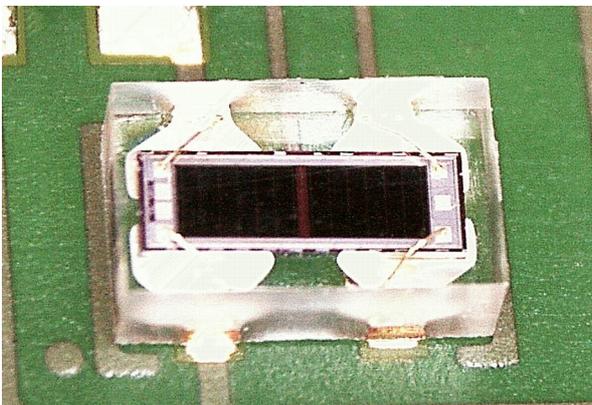


### KEY CHARACTERISTICS

Parameter	Typ	Unit
Package size	2.9 x 1.8 x 0.9	mm
A1, A2 photodiode size	0.91 x 0.62	mm
A1, A2 peak wavelength	630	nm
A1, A2 dark current @ 27°C	8	pA
Capacitance A1 / A2 @ 10V	25	pF
Sub @ 10V	60	pF

### CIRCUIT

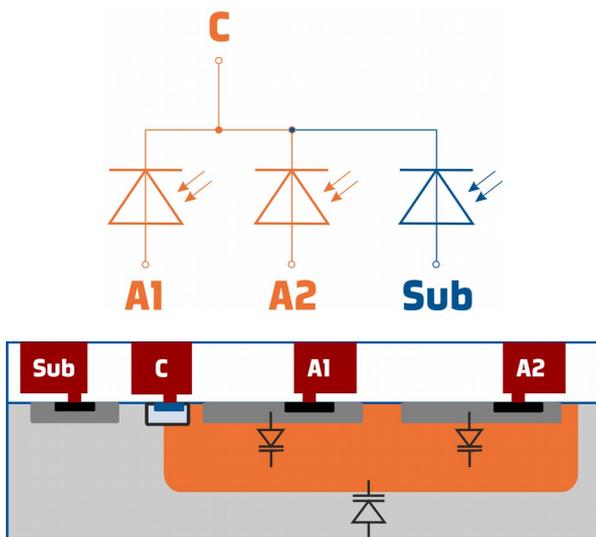

### SPECTRAL SENSITIVITY

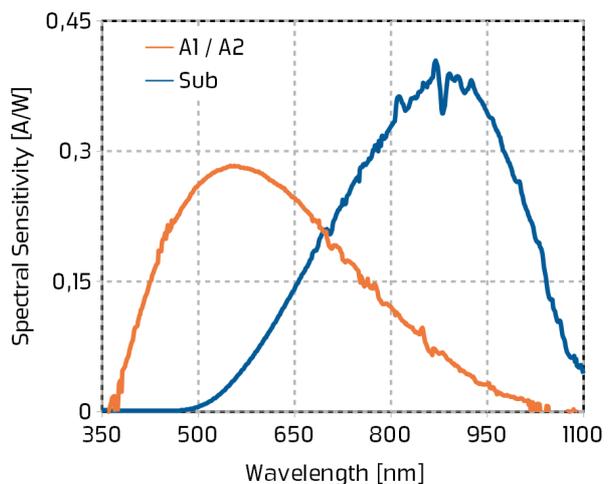

# Photodiode PR5010



## Electrical and optical Characteristics

### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter		Min	Max	Units
$V_{C-A}$	$V(C) - V(A1, A2)$	A1, A2	-0.3	38	V
$V_{C-Sub}$	$V(C) - V(Sub)$	Sub	-0.3	33	V
$T_A$	Operating ambient temperature		-40	85	°C
$T_S$	Storage temperature		-40	85	°C
$T_{peak}$	Soldering peak temperature			260	°C
$P_{tot}$	Total Power Dissipation			100	mW

### ELECTRICAL CHARACTERISTICS

$T_a = 27^\circ\text{C}$ , unless otherwise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$V_{r(C-A)}$	reverse voltage $V(C) - V(A1, A2)$	A1, A2			33	V
$V_{r(C-Sub)}$	reverse voltage $V(C) - V(Sub)$	Sub			28	V
$A_{PD}$	active area (geometrical)	A1, A2 Sub		0.564 1.205		mm <sup>2</sup> mm <sup>2</sup>
$I_d$	dark current	A1, A2 Sub	A1 / A2 @ $V_r = 2V$ Sub @ $V_r = 2V$	8 1		pA pA
$\Delta I_d / \Delta T$	temperature coefficient of dark current	A1, A2 Sub	A1 / A2 @ $V_r = 2V$ Sub @ $V_r = 2V$	12.0 10.5		%/K %/K
$\lambda_{peak}$	peak sensitivity wavelength	A1, A2 Sub		560 875		nm nm
$S_{peak}$	peak sensitivity	A1, A2 Sub		0.28 0.39		A/W A/W
$C_{j0}$	zero-bias junction capacitance	A1, A2 Sub	$V_r = 0V, f = 1\text{ MHz}$ $V_r = 0V, f = 1\text{ MHz}$	70 160		pF pF
$C_j$	biased junction capacitance	A1, A2 Sub	$V_r = 10V, f = 1\text{ MHz}$ $V_r = 10V, f = 1\text{ MHz}$	25 60		pF pF

# Photodiode PR5010

## Electrical and optical Characteristics

### PHOTODIODE STRUCTURE

Due to the special structure of the PR5010, it contains two different types of photodiodes, collecting photo-electrons at different depths. Photodiodes A1 and A2 are located near the silicon surface, while photo-electrons that are generated deeper in the substrate are collected at the Sub Pin.


This leads to different spectral sensitivities of A1/A2 and Sub photodiodes.

While PR5001 can be used as a dual photodiode with common anode, dumping the photocurrent of the Sub to ground, the properties of the Sub photodiode can be exploited as well.

### CAPACITANCE


The dependency of the capacitance between A1 or A2 and C on the applied reverse voltage  $V(A1) - V(C)$  or  $V(A2) - V(C)$  is shown in orange. The capacitance of the photodiode between C and the silicone substrate (Sub) as a function of  $V(C) - V(Sub)$  is given in blue.

While the bigger diagram illustrates the absolute numbers, the normalized capacitance is shown in the inset. It can be seen that a reverse voltage of about 3 V already reduces the capacitance by a factor of 2 compared with zero bias.

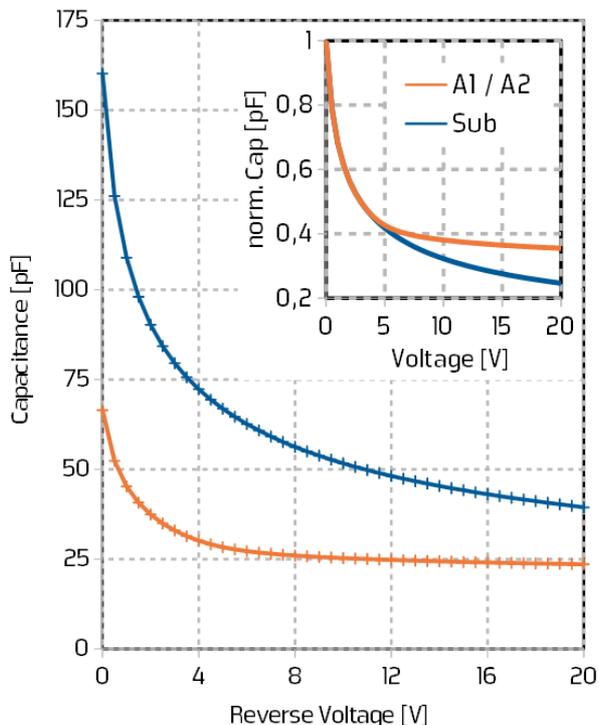

### SENSITIVITY AFFECTED BY APPLIED VOLTAGES

The difference of photo-currents at A1/A2 detected by varying the reverse voltage of the photodiodes A1/A2 and the substrate voltage (-4 V, -8 V and -16 V) is illustrated. Three levels of illumination are applied using monochromatic light with a wavelength of 630 nm. For zero reverse voltage and a substrate voltage of -16 V, photocurrents of 1353 nA, 885 nA and 120 nA are obtained. It can be seen that enhancing both voltages leads to slightly enhanced photo-currents. While the absolute difference increases with illumination, the relative deviation is at most ~1,5% for high illuminations.

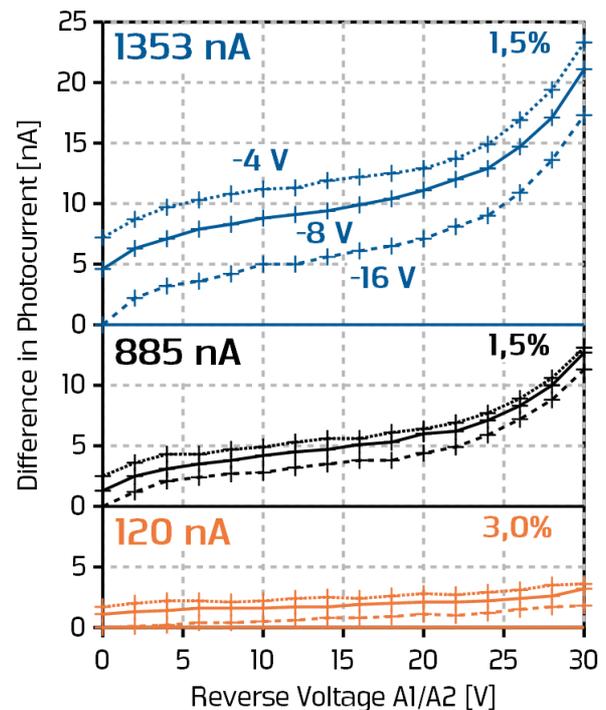


# Photodiode PR5010

## Dark Current

### MEASUREMENT SETUP


Dark currents of A1, A2 and Sub photodiodes are measured as a function of the reverse voltage  $V(C) - V(Sub)$  and of temperature. A1, A2 and Sub are connected to Ground, while a positive voltage is applied to C.

The dark current of A1 can be obtained by subtracting  $I(A1 - Sub) - I(C - Sub)$ .

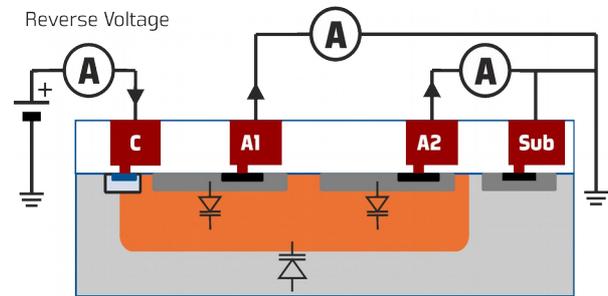

### OVER TEMPERATURE


Dark currents of single photodiodes A1 or A2 are illustrated as dashed lines. By taking the dark currents of A1 and A2 into account, the dark currents of the photodiode between the N-well (C) and the substrate (Sub) can be calculated. For varied applied reverse voltages, these are shown as solid lines.

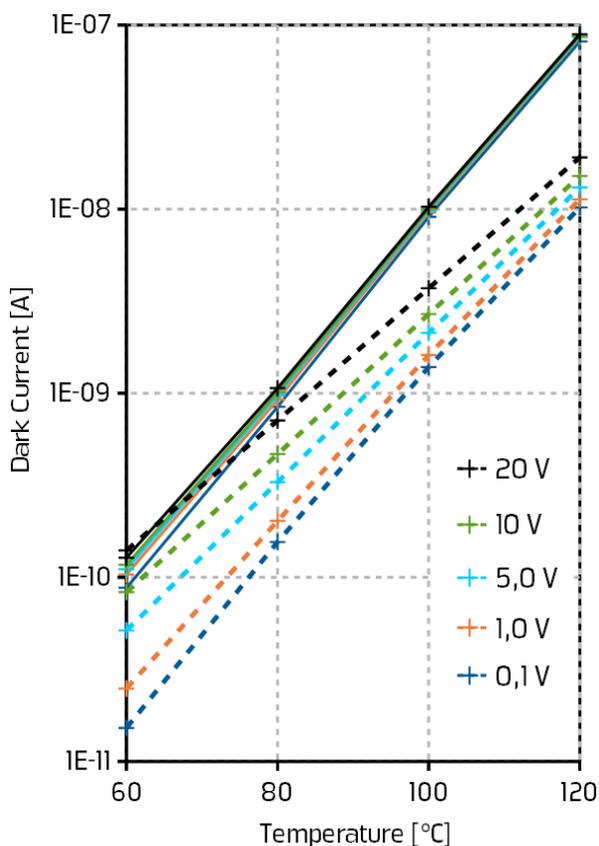

### AS A FUNCTION OF REVERSE VOLTAGE

For varied applied temperatures, dark currents of single photodiodes A1 or A2 are illustrated as single points. Again, the dark current between the N-well (C) and the substrate (Sub) are shown as solid lines.

Both diagrams rely on the same numbers but illustrated differently.

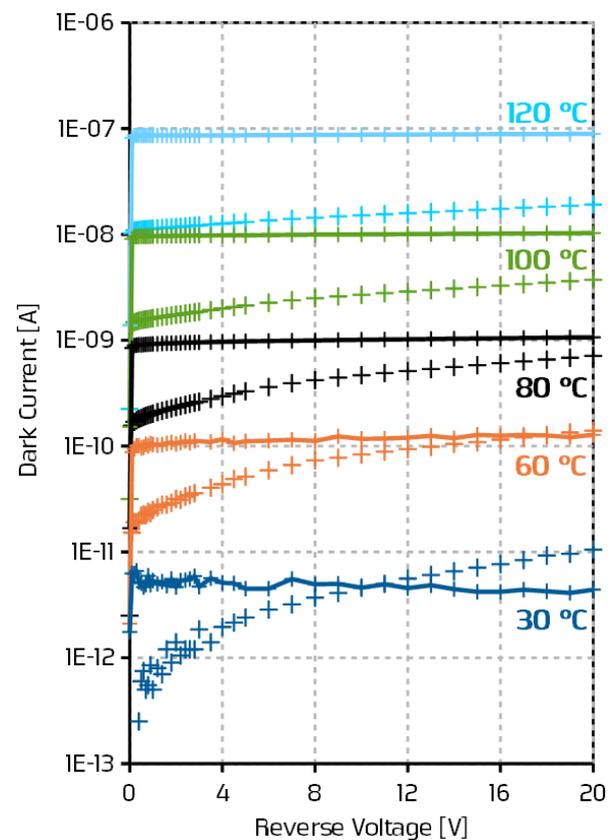

# Photodiode PR5010

## Application Notes

### NEGATIVE VOLTAGE AT THE SUB PIN


The cathode of the photodiodes A1/A2 is formed by an N-doped well (C) that has also a parasitic photodiode to the silicon substrate. Under all circumstances, the Sub pin must be connected to a voltage that is more negative than the potential at C. The Sub pin must not remain unconnected. A1 and A2 must be connected to a voltage equal or more negative than connected at C.

### APPLICATION EXAMPLE

The application example shown here can detect photons generating free carriers within and below the N-well (orange). A reverse voltage between C and A1/A2 reduces the capacitance of A1 and A2. Measuring the photocurrent at each


pin gives a spacial resolution. The reverse voltage between the common cathode (C) and the substrate (Sub) influences properties as capacitance or dark current of the photodiode below the N-well.

In the application example, the photocurrent of the shallow photodiodes A1 and A2 can be measured separately from the deep Sub photodiode.

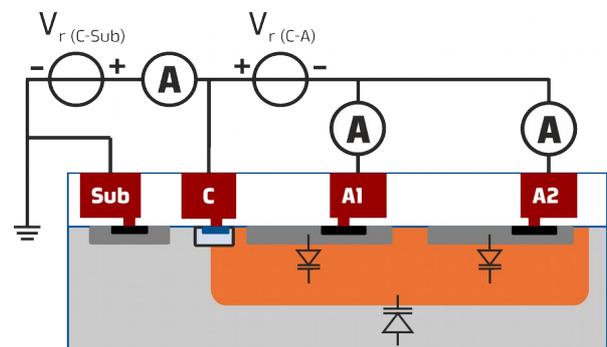

### EDGE DETECTOR

The evaluation of the photo-currents detected at A1 and A2 can be used to measure the correct position of an object. If the object is right between both photodiodes, the difference of both signals is at maximum.

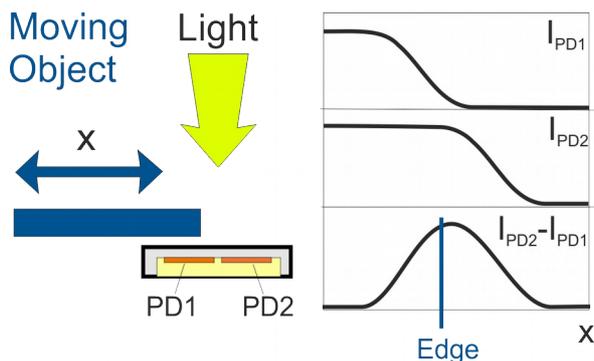


### CHANNEL SEPARATION

The following diagram shows the crossover of a light beam between both photodiodes A1 and A2. A light beam with a diameter of 100  $\mu\text{m}$  and a wavelength of 660 nm (red) was moved in in-

crements of 10  $\mu\text{m}$  over the gap between A1 and A2. The position of 0  $\mu\text{m}$  corresponds to the centre of the die.


Considering the beam diameter of 100  $\mu\text{m}$  and a gap between both photodiodes of 80  $\mu\text{m}$ , the observed behaviour is consistent with a sharp channel separation. Neither the substrate bias ( $V_{\text{sub}}$ ) nor the A1/A2 bias voltages  $V_{\text{A1/A2}}$  have a significant influence on the results.

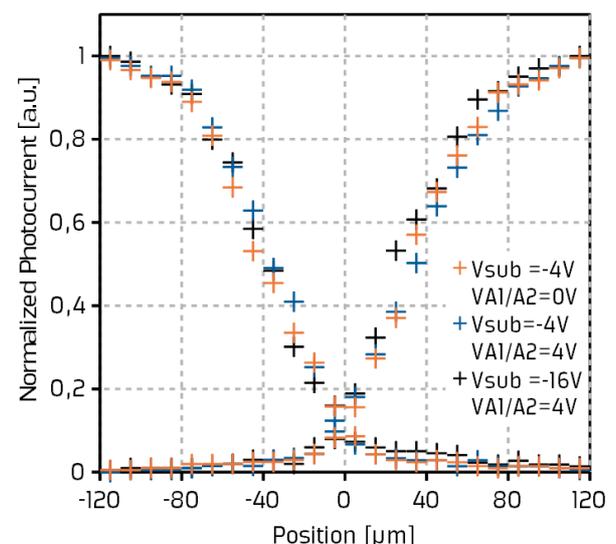

# Photodiode PR5010

## Package Information

### PR5010

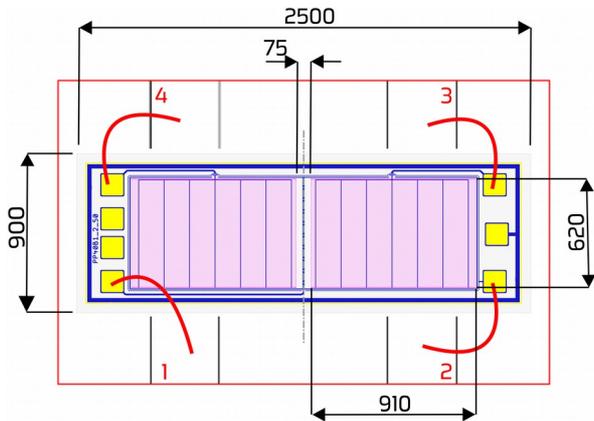


### PIN CONFIGURATION

Pin No.	Pin Name	PIN Function Description
1	C	Common Cathode
2	Sub	Anode photodiode 'Sub'
3	A2	Anode photodiode 'left'
4	A1	Anode photodiode 'right'

### ODFN-4L - PACKAGE

	MIN	TYP	MAX	Unit
<b>A</b>	0.85	0.9	0.95	mm
<b>A3</b>		0,20 REF.		mm
<b>b</b>	0.35	0.4	0.45	mm
<b>D</b>	2.8	2.9	3	mm
<b>E</b>	1.7	1.8	1.9	mm
<b>e</b>		1,4 BSC*		mm
<b>L</b>	0.6	0.7	0.8	mm

\* Basic Spacing Between Centers

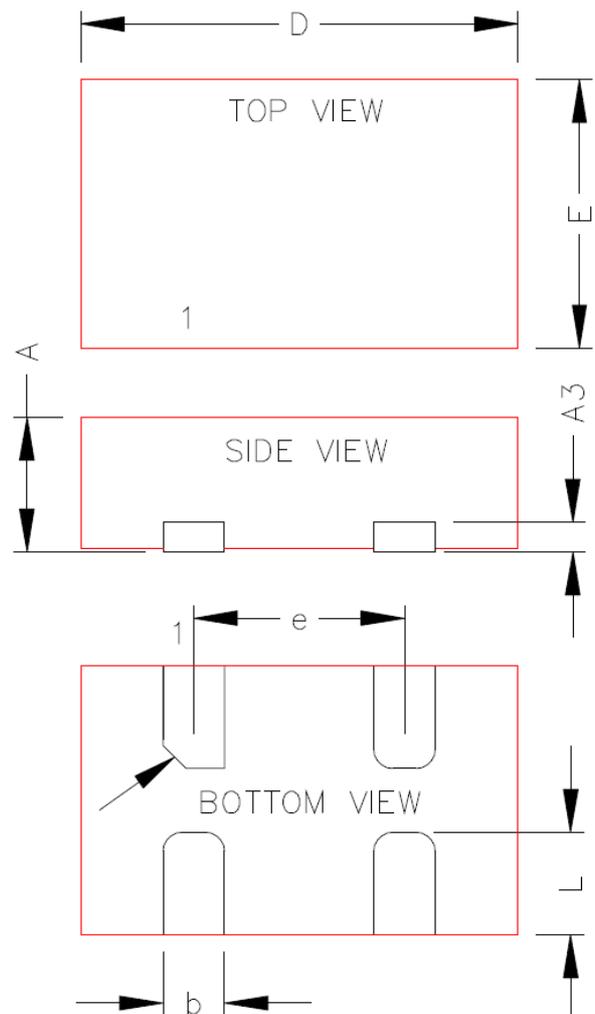

# Photodiode PR5010



## Package Information

---

### SOLDERING INFORMATION

---

A lead-free solder profile with a peak temperature of 260°C or less, according to J-STD-020 should be followed.

Parts should be handled in accordance with the moisture sensitivity level as indicated on the moisture barrier bag, but at least to MSL 3.

Any parts without or with unsealed moisture barrier bag must be dry-baked according to JEDEC guidelines before soldering. Manual soldering must be done with utmost care.

Direct infrared heating should be avoided; pure convection heating is recommended.

### TAPE & REEL

---

Reel diameter: 7" (178 mm)

Tape width: 8 mm

Quantity per reel: 3,000

Packaging: moisture barrier bag

Orientation of ICs in tape: Pins 3 and 4 towards sprocket holes

### BARE DIES

---

PR5010 is available as bare dies on request on tested and sawn wafers or in wafflepack.

Please contact us for minimum order quantities and delivery times.

---

### Disclaimer

Information provided by PREMA is believed to be accurate and correct. However, no responsibility is assumed by PREMA for its use, nor for any infringements of patents or other rights of third parties which may result from its use. PREMA reserves the right at any time without notice to change circuitry and specifications.

### Life Support Policy

PREMA Semiconductors products are not authorized for use as critical components in life support devices or systems without the express written approval of PREMA Semiconductor. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labelling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### PREMA Semiconductor GmbH

Robert-Bosch-Str. 6

55129 Mainz Germany

Phone: +49-6131-5062-0

Fax: +49-6131-5062-220

Email: [prema@prema.com](mailto:prema@prema.com) Web site: [www.prema.com](http://www.prema.com)